











Longse Smart Solution Device List

Ver.: V202006B




Smart Face Recognition Temperature Device			
Product Show	Model No.	Specification	Chief Characteristics
	FK02GYW	<ul style="list-style-type: none"> ◆ Face Recognition, Face Capture, Face Comparison ◆ Temperature Detection ◆ Fever Warning, Mask Detection ◆ Support data output and Management: complete face capture, recognition, temperature records ◆ More Secure: Non-contact forehead temperature detection to prevent cross-infection ◆ High Precision: temperature detection distance 0.5-1M, 0.75M is best, temperature error range $\pm 0.3^{\circ}\text{C}$ ◆ More Efficient: face recognition distance: 0.5-1.5M Recognition Speed/Accuracy: 200ms, 99.5% ◆ Face database 30,000pcs, support date import and output ◆ Aircraft-grade aluminum and 7 inch ISP LCD screen 1024*600 ◆ Easy-operation to connect to gate machine ◆ Application Scenarios: school, community, company, office building, super market, station etc. 	<p>Standard is vertical bracket with 190mm pole Optional 1: Wall bracket Optional 2: Extension bracket with 390mm pole add 14USD With rain cover add 12USD</p> <p>Dual Camera: Infrared Camera: 2MP, NIR 800*600 15fps, 2.4mm lens Video Camera: 2MP SONY Sensor, 1920*1080@30fps, 4.5mm lens</p> <p>Operating system: Linux AI processor: MX3520, DDR3 512MB, EMMC 8GB</p> <p>LED Light: Infrared Light, White Light Interface: RS485, RS232, RJ45, Relay output, Reset key Rated voltage: dc 12V input</p> <p>Panel size: 219x111x21.5mm Weight: 2.7Kgs Weight: 2.85 Kgs (Extension) 57*42*34CM 6PCS/CTN</p>
Smart Face Recognition Device			
Product Show	Model No.	Specification	Chief Characteristics
	FK02GY	<ul style="list-style-type: none"> ◆ Face Recognition, Face Capture, Face Comparison ◆ Support data output for checking: complete face capture, recognition ◆ More Efficient: face recognition distance: 0.5-1.5M Recognition Speed/Accuracy: 200ms, 99.5% ◆ Face database 30,000pcs, support date import and output ◆ Aircraft-grade aluminum and 7 inch ISP screen 1024*600 ◆ Easy-operation to connect to gate machine ◆ Application Scenarios: school, community, company, office building, super market, station etc. ◆ Wall Bracket is optional 	<p>Dual Camera: 1xVideo, 1xLiving detection 2MP SONY Sensor, 1080p@30fps, 4.5mm lens Operating system: Linux AI processor: MX3520, DDR3 512MB, EMMC 8GB</p> <p>White LED Light Interface: RS485, RS232, RJ45, Relay output, Reset key Rated voltage: dc 12V input</p> <p>Panel size: 219x111x21.5mm Bar size: 33x189mm Weight: 2.7Kgs 55*42*34CM 6PCS/CTN</p>
AI Thermal IP Camera			
Product Show	Model No.	Specification	Chief Characteristics
	TNC01	<ul style="list-style-type: none"> ◆ Face Detection and Automatic Face tracking, Body Temperature Detection, Face Capture ◆ Bi-spectrum Image Fusion IP cam built-in AI algorithm ◆ Fusion view of thermal view and overlaid details of the optical channel ◆ Picture-in-picture preview; Support for capture and save in PC of personnel in and out ◆ For multi-person measurements up to 2-3m distances ◆ Face snapping support 10-15 faces detection simultaneous; Accurate temperature 5-8 faces ◆ Up to 15 palettes of adjustable color ◆ Highly accurate temperature measurement within $\pm 0.5^{\circ}\text{C}$, with black body $\pm 0.3^{\circ}\text{C}$ ◆ Support global and local temperature ◆ Temperature-anomaly alarm ◆ Temperature Range for Module -15°C to $+150^{\circ}\text{C}$; ◆ Work Temperature -20°C to 55°C ◆ Single IP solution, rich network expansion capability, easy to access various video monitoring platforms 	<p>IP67 Dual Camera: Thermal Module: Resolution 256x192, NETD Less than 60 mK (@25°C, F#=1.1), F1.0, FOV: $35^{\circ} \times 27^{\circ}$ (H x V), 4mm lens Video Camera: 1920x1080@30fps, 1/2.8" 2.0M Pixel CMOS, WDR, Low lux.: Color: 0.005Lux, B/W 0.001, Lens 3.6mm, FOV: $84^{\circ} \times 45^{\circ}$ (H x V)</p> <p>Smart Fuction: Built-in deep learning AI algorithm, Supports simultaneous detection</p> <p>Video Compression: H.265+ /H.265 / H.264/ +MJPEG Protocols: TCP/IP, ONVIF, GB/T 28181, DHCP, RTP, RTSP, PPPoE UPnP, UDP, ONVIF Alarm and Audio Input Support Power DC 12V Input, Size: 246 mm x 101 mm x 81 mm Weight: 1.1Kgs 64*51*27CM 16PCS/CTN</p>

	TNC02	<ul style="list-style-type: none"> ◆ Face Detection and Automatic Face tracking, Body Temperature Detection, Face Capture ◆ Bi-spectrum Image Fusion IP cam built-in AI algorithm ◆ Fusion view of thermal view and overlaid details of the optical channel ◆ Picture-in-picture preview; Support for capture and save in PC of personnel in and out ◆ For multi-person measurements up to 5m distances ◆ Face snapping support 20-30 faces detection simultaneous, Built-in 50,000 face database ◆ Up to 15 palettes of adjustable color ◆ Highly accurate temperature measurement within $\pm 0.3^{\circ}\text{C}$, with black body $\pm 0.1^{\circ}\text{C}$ ◆ Support global and local temperature ◆ Temperature-anomaly alarm ◆ Temperature Range for Module -15°C to $+150^{\circ}\text{C}$; ◆ Work Temperature -20°C to 55°C ◆ Single IP solution, rich network expansion capability, easy to access various video monitoring platforms 	<p>IP67 Dual Camera: Thermal Moudle: Resolution 384*288, 7.8mm lens Video Camera: 1920x1080@30fps, 1/2.8"2.0M Pixel CMOS,WDR, Low lux.:Color: 0.005Lux, B/W 0.001, Lens 3.3-10.5mm 4X Auto Focus, FOV. 84° x 45° (H x V) Smart Fuction: Built-in deep learning AI algorithm, Supports simultaneous detection</p> <p>Video Compression: H.265+ /H.265 / H.264/ +MJPEG Protocols:TCP/IP, ONVIF, GB/T 28181, DHCP. RTP, RTSP,PPPoE UPnP, UDP, ONVIF Alarm and Audio Input Support</p> <p>Power DC 12V Input, Size:246 mm x 101 mm x 81 mm Weight:waiting</p>
	BK01	Black body matched for Thermal IP Camera TNC01,TNC02 to improve temperature accurate	<p>Voltage: AC100~240V; Maxim Power Consumption: 260W; environment temperature: $0^{\circ}\text{C}\sim+40^{\circ}\text{C}$ Working Temperature: $+5^{\circ}\text{C}\sim+100^{\circ}\text{C}$ Calibration temperature: $35\sim 37^{\circ}\text{C}$; Effective radiant surface: 100mm*80mm Size:246 mm x 101 mm x 81 mm Weight: 10Kgs</p>

Gate Machine Series

Product Show	Model No.	Specification	Chief Characteristics
	GMS01-SC	<ul style="list-style-type: none"> ◆ Type: Anti-collision Swing Gate ◆ GMS01-SC: Single Channel,Single Movement ◆ GMS01-TC: Two Channel,Dual Movement ◆ Support relay switch signals ◆ One-way or two-way control: External switch button or remote control 	<p>Material: 304 Stainless, brushless anti-collision movement, with 8MM armoured glass at side, aluminium alloy chuck, acrylic swing arm Swing arm length: 370mm standard (extendable) Channel Width: $\leq 780\text{mm}$ Input voltage: $\text{AC}220\pm 10\%\text{V}$, 50HZ Drive voltage:24V , Drive single: 12V Passing speed: 35 persons/min Infrared: 4 Pairs Interface: RS485/TCP/IP Size: 1200*186*980mm GMS01-SC Weight: 135Kgs GMS01-TC Weight: 190Kgs</p>
	GMS01-TC	<ul style="list-style-type: none"> ◆ Anti-pinch: Can detect and stop running automatically ◆ Switching speed: 0.5-1s is adjustable, 16 ears optional ◆ Normally open and closed adjustable ◆ After turned off, the swing arm stay openg automatically ; The swing arm opening direction is adjustable. ◆ High-brightness indicator, Humanized traffic indication ◆ Runs smoothly with low noise, Satety 	
	GMW01-SC	<ul style="list-style-type: none"> ◆ Type: Anti-collision Wing Gate ◆ GMW01-SC: Single Channel,Single Movement ◆ GMW01-TC: Two Channel,Dual Movement ◆ Support relay switch signals ◆ Self-check at zero 	<p>Material: 304 Stainless Swing arm length: 270mm standard (extendable) Swing arm color: transparent acrylic (Red/Blue is optional) Channel Width: $\leq 600\text{mm}$ Input Voltage: $\text{AC}220\text{V}\pm 10\%$ 50Hz$\pm 4\%$ Drive voltage:24V , Drive single: 12V Passing speed: 35 persons/min Infrared: 3 Pairs Interface: RS485/TCP/IP Size: 1200*300*980mm GMW01-SC Weight: 198Kgs GMW01-TC Weight: 286Kgs</p>
	GMW01-TC	<ul style="list-style-type: none"> ◆ Anti-shock ◆ Double anti-pinche: Infrared / mechanical ◆ Alarm for illegal entry! ◆ Automatic reset: if not pass in the allowed time, the system will cancle the passing rights ◆ Runs smoothly with low noise, Satety 	
	GMR01	<ul style="list-style-type: none"> ◆ Type:Three Roller Gate, Single Movement ◆ Support relay switch signals ◆ Three modes optional:two-way card reading、 one way reading card while other side is prohibited、 one way reading card and other side is free passing ◆ Power off and drop the pole / power on manually putting pole ◆ Remote Control of opening / power-off and lever-down ◆ Automatically count the number of passengers ◆ Pass Direction indication ◆ Card reader: with memory and without memory (optional) ◆ Automatic reset ◆ Runs smoothly with low noise 	<p>Material: 304 Stainless Channel Width: $\leq 500\text{mm}$ Steering of Brake lever : unidirectional, bidirectional (optional) Power supply voltage: $\text{AC}220\text{V}\pm 10\%$, 50Hz Drive voltage: 24V, Drive signal: 12V Passing speed: 30 persons/min interface: RS485 electrical standard, communication distance: <1200 meters Size: 1200*280*980mm Weight: 110Kgs</p>

Bracket for Face Recognition Device

Product Show	Model No.	Specification	Chief Characteristics
	A003	Tablet bracket	2xUSB: 1x LED light Network Input, 1x12V DC Input Stand size: 283(L)x260(W)x38(H)mm Weight: 1.8Kgs CTN Size: 55*40*37CM 10pcs/CTN
	A060	Floor Pole bracket , 60CM	2xUSB: 1x LED light Network Input,1x12V DC Input Stand size: 283(L)x260(W)x600(H)mm Weight: 13.7Kgs
	A110-1	Floor Pole bracket,110CM Weight: 6Kgs	2xUSB: 1x LED light Network Input,1x12V DC Input Stand size: 283(L)x260(W)x1100(H)mm CTN Size: 122*31*34CM 4Sets/CTN
	A110-2	Base for Floor Pole bracket Weight: 3Kgs	

Terms & Conditions

Price Terms: SAY US\$, EX-Works Guangzhou Factory

Terms of Payment: T/T, L/C

Warranty: One Year After Shipping Date

MOQ: 10pcs/model after sample order

Attention: The unit price fluctuates according to the change of parameters and market. And the price above does not include the delivery charges or other expense.

Contact Longse



Longse
More secure, More intelligent

Tel : +86 20 66217333 **Fax :** +86 20 66217338


E-mail: sales@longse.com

Website: http://www.longse.com

Facebook: https://www.facebook.com/longSF2006/



No.728 Kaichuang Ave., Economic & Technological Development Zone, Guangzhou, China 510530

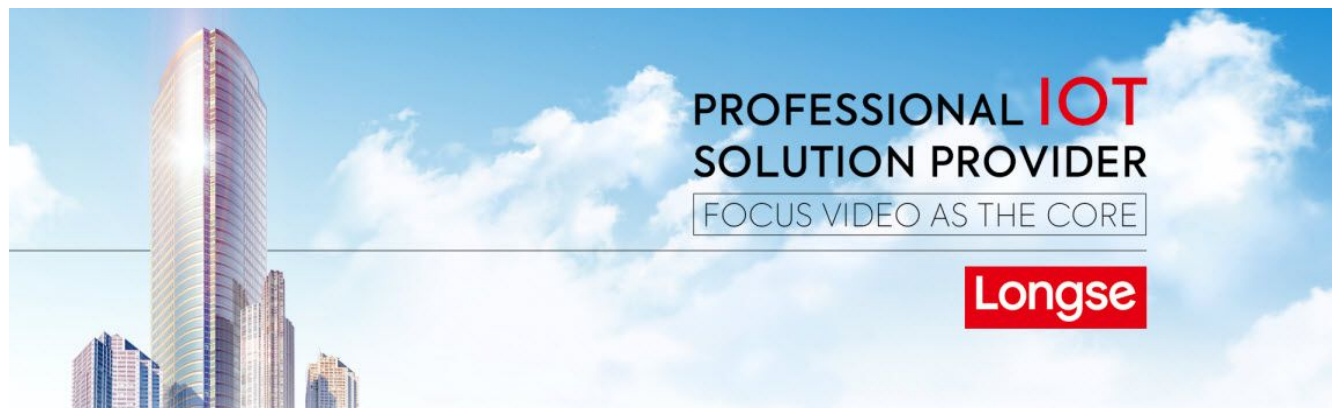

**PROFESSIONAL IOT
SOLUTION PROVIDER**

FOCUS VIDEO AS THE CORE

Longse